

Validate Network Connectivity In Less Than 10 Seconds

Key features include:

- Quick and simple to use
- Understand if a network connectivity issue is in the PC or the network and locate the problem if it is in the network
- Zero touch reporting automatically sends every test to Link-Live Cloud Service saving time and ensuring accuracy in reporting
- Priced to fit every IT budget as a personal tool everyone can have allowing teams to solve problems faster without the need for a shared device



LinkSprinter is a pocket-sized Ethernet tester that provides complete end-to-end network connectivity testing and automated cloud-based reporting all with the touch of a button. LinkSprinter is used by PC help desk, front line technicians, network engineers and many others, to validate network connectivity, cable, and that power is correctly being applied to PoE powered devices.

Simply connect an Ethernet cable and the LinkSprinter goes to work checking the connection path from wall jack to internet, and in less than 10 seconds, you'll know that status of the connection path through color coded LEDs.



LinkSprinter Awards

Big Things Come In Small Packages

Don't let LinkSprinter's small stature fool you as it's packed with capability and provides several custom configuration options that can be set per tester or within Link-Live Cloud Service.

LinkSprinter runs a series of standardized tests to ensure consistency in workflow and documentation across team members regardless of skill level.

- **Power Over Ethernet (PoE)**
Check to make sure you can power a phone, security camera or Access Point through a specific port. The LinkSprinter Network Tester can even run without batteries on PoE.
- **Link to the Switch**
Perform a switch test, which indicates switch name, model, slot, port and VLAN you are connected to using CDP/LLDP/EDP. Know your available speed and duplex settings.
- **DHCP Connection**
Confirm that the DHCP server is running and responsive. Request an IP address, get your subnet information, and identify the default gateway and DNS server.
- **Gateway Connection**
Verify the gateway/router address and reachability by pinging the device.
- **Internet Connection**
Confirm cloud connectivity or internal service reachability. Verify DNS server lookup and application port connectivity.


Quick Answers to Common Tasks

- **Moves, Adds, Changes**
Validate proper connectivity including IP subnet and VLAN so you're ready when devices arrive.
- **PoE Validation**
Ensure switch port provisioning and cabling before installing cameras, phones, or wireless access point.
- **PC Help Desk**
Is the problem in the PC or the Network? If it's the network, find out where so you can escalate with facts.
- **Gateway Connection**
Verify the gateway/router address and reachability by pinging the device.
- **Remote Site Network Connectivity Validation**
Leave one on site as an office assistant can run a test while the NOC sees the detailed result appear on the Link-Live Cloud Service dashboard.

RESULT MANAGEMENT OPTIONS

Link-Live Cloud Service

Once the LinkSprinter is connected to the Link-Live Cloud service, basic network connectivity test results are automatically uploaded to the dashboard for project management and reporting. This internet-hosted service is available from anywhere at any time using any device with a browser and internet connection. It is especially useful for managers of remote teams that need visibility to test results instantly. In addition, teams that utilize companions to the LinkSprinter, such as the LinkRunner AT, AirCheck G2, or OneTouch AT have a single dashboard system to manage results from network connectivity tests.

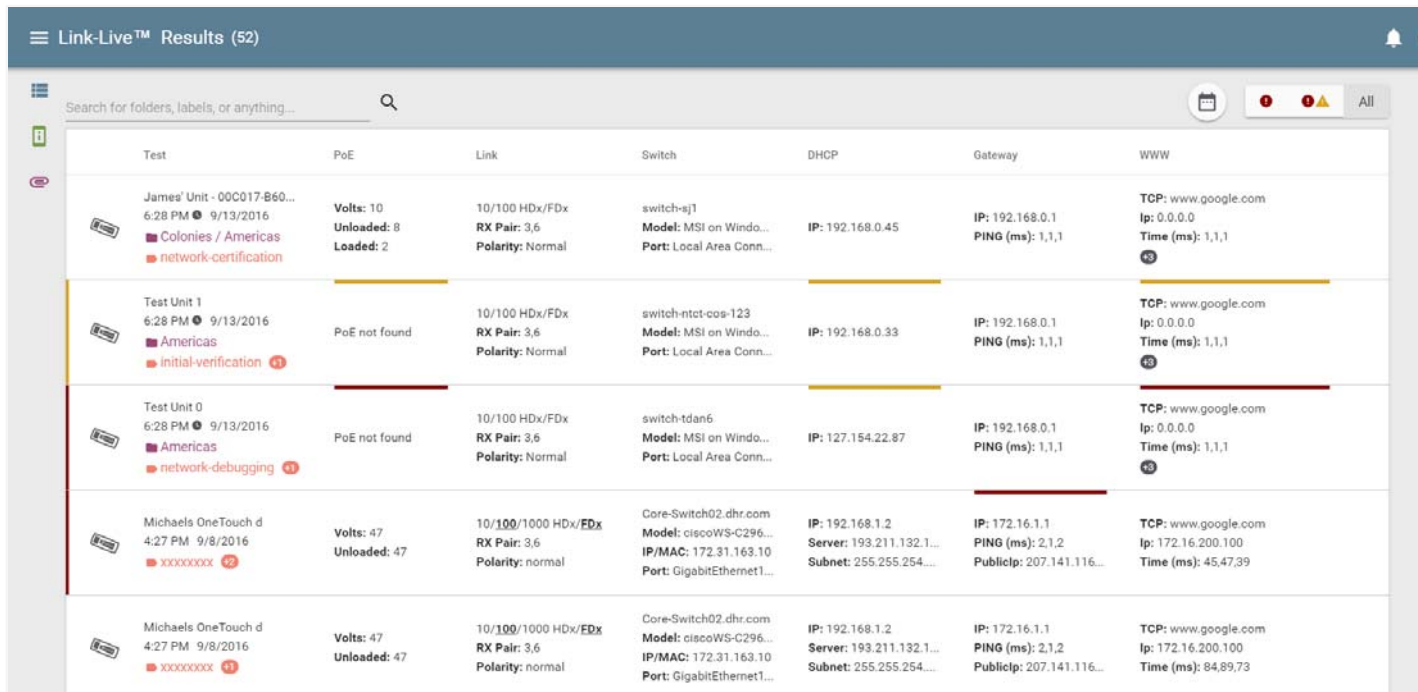

The screenshot shows the Link-Live Results dashboard with a table of test results. The table has columns for Test, PoE, Link, Switch, DHCP, Gateway, and WWW. Each row represents a different test run with various details like time, location, and network parameters.

Test	PoE	Link	Switch	DHCP	Gateway	WWW
James' Unit - 00C017-B60... 6:28 PM 9/13/2016 Colonias / Americas network-certification	Volts: 10 Unloaded: 8 Loaded: 2	10/100 HDx/FDx RX Pair: 3,6 Polarity: Normal	switch-aj1 Model: MSI on Windo... Port: Local Area Conn...	IP: 192.168.0.45	IP: 192.168.0.1 PING (ms): 1,1,1	TCP: www.google.com Ip: 0.0.0.0 Time (ms): 1,1,1
Test Unit 1 6:28 PM 9/13/2016 Americas initial-verification	PoE not found	10/100 HDx/FDx RX Pair: 3,6 Polarity: Normal	switch-ntct-cos-123 Model: MSI on Windo... Port: Local Area Conn...	IP: 192.168.0.33	IP: 192.168.0.1 PING (ms): 1,1,1	TCP: www.google.com Ip: 0.0.0.0 Time (ms): 1,1,1
Test Unit 0 6:28 PM 9/13/2016 Americas network-debugging	PoE not found	10/100 HDx/FDx RX Pair: 3,6 Polarity: Normal	switch-tdan6 Model: MSI on Windo... Port: Local Area Conn...	IP: 127.154.22.87	IP: 192.168.0.1 PING (ms): 1,1,1	TCP: www.google.com Ip: 0.0.0.0 Time (ms): 1,1,1
Michaels OneTouch d 4:27 PM 9/8/2016 xxxxxxxx	Volts: 47 Unloaded: 47	10/100/1000 HDx/EDx RX Pair: 3,6 Polarity: normal	Core-Switch02.dhr.com Model: ciscoWS-C296... IP/MAC: 172.31.163.10 Port: GigabitEthernet1...	IP: 192.168.1.2 Server: 193.211.132.1... Subnet: 255.255.254...	IP: 172.16.1.1 PING (ms): 2,1,2 PublicIp: 207.141.116...	TCP: www.google.com Ip: 172.16.200.100 Time (ms): 45.47,39
Michaels OneTouch d 4:27 PM 9/8/2016 xxxxxxxx	Volts: 47 Unloaded: 47	10/100/1000 HDx/EDx RX Pair: 3,6 Polarity: normal	Core-Switch02.dhr.com Model: ciscoWS-C296... IP/MAC: 172.31.163.10 Port: GigabitEthernet1...	IP: 192.168.1.2 Server: 193.211.132.1... Subnet: 255.255.254...	IP: 172.16.1.1 PING (ms): 2,1,2 PublicIp: 207.141.116...	TCP: www.google.com Ip: 172.16.200.100 Time (ms): 84.89,73

Link-Live dashboard

Technical Specifications

Operating Temperature and Relative Humidity	32°F to 122°F (0°C to 50°C), Relative Humidity 5% to 90% Non-condensing
Storage Temperature	-4°F to 140°F (-20°C to 60°C)
Shock and Vibration	Random 2g, 5 Hz – 500 Hz (class 2), 1m drop
Safety	CAN/CSA-C22.2 No. 61010-1-12, UL Std. No. 61010-1 (3rd Edition), IEC61010- 1:2010, Pollution degree 2
Altitude	Operating: 13,123 ft. (4,000 m) Storage: 39,370 ft. (12,000 m)
EMC	EN 61326-1:2006
Certifications and Compliance	Conforms to relevant European Union directives Conforms to relevant Australian standards Listed by the Canadian Standards Association Conforms to relevant FCC standards
Dimensions	4.36" x 1.6" x 1.28" (11.07 cm x 4.06 cm x 3.25 cm)
Weight with batteries	Model 300: 0.255 lb (0.116 kg)
Battery	2 AA Alkaline
Specification Compliance	IEEE 802.11b/g
Frequency Channels	802.11 Channels 1 thru 11 default is 11
Operating Frequency	2.412 ~ 2.484 GHz, ISM Band
Regulatory Domain	EN 301 489-1/17
Browser	Internet Explorer 9.0, Firefox 3.6, Chrome 5.0, Safari 5.1 (minimum revision)

Ordering Guide

Item Name	Description
LSPRNTR-300	Includes 1 LinkSprinter and wrist strap
LSPRNTR-300-5PK	Includes 5 LinkSprinter's at a reduced price
LSPRNTR-300-10PK	Includes 10 LinkSprinter's for the price of 9
LSPRNTR-HOLSTER	Belt attachable holster carries one LinkSprinter and includes short patch cable and business card holder
LINKSOLUTIONS-KIT	Includes 1 LinkRunner AT 2000 with standard components, 2 LinkSprinter's and 2 LinkSprinter Holsters

For a complete listing of LinkSprinter models and accessories, visit:
<http://enterprise.netscout.com/linkprinter>